

SW-4010Q-MCL

Technical Datasheet

Custom



See the possibilities



Apex Series




JAI's Sweep Series includes both monochrome and trilinear color line scan cameras with line rates that are among the fastest available for their type and resolution.

The Sweep SW-4000TL trilinear models deliver outstanding color line scan images for applications that don't require the ultimate image precision provided by the Sweep+ Series.

Specification Highlights

SENSOR:	Custom	SHUTTER:	Global Shutter
FORMAT:	30.72 mm	FRAME RATE:	39 kHz
PIXEL SIZE:	7.5 x 7.5 μm / 25.0 x 25.0 μm	INTERFACE:	Mini Camera Link
LENS MOUNT:	F-Mount	RESOLUTION MP:	N/A MP
SPECTRUM:	Multispectral (4-Bands R-G-B + SWIR)	RESOLUTION WxH:	4096 x 1 px / 1024 x 1 px

Specifications	SW-4010Q-MCL
Scanning system	3 CMOS + 1 InGaAs line sensors, prism-mounted
Active pixels	3 x 4096 pixels (R, G, B), 1 x 1024 (SWIR)
Line rate	Up to 39.2 kHz (for 2048 RGB + 1024 SWIR)
Sensor width	30.72 mm (R, G, B) / 25.6 mm (SWIR)
Pixel size	R, G, B sensors: 7.5 μm x 7.5 μm SWIR sensor: 25 μm x 25 μm
Pixel clock (Camera Link)	42.5 / 63.75 / 85 MHz
Video output	Dual Camera Link Base Output 1. RGB8-bit (RGB10/12-bit with custom pixel format) 2. SWIR8/10/12-bit
Image scaling	Rescales RGB pixel size and line width. 25 μm @ 1024 px, 12.5 μm @ 2048 px, or user-defined.
Inputs (Trigger)	Camera Link, Opto in, TTL via 12-pin, 2 TTL via 10-pin
Outputs	2 TTL via 12-pin, 2 TTL via 10-pin
Gain	Analog Base: 0 - 12 dB (RGB), -6 - +3 dB (SWIR) Dig. Master: 0 to +30 dB, R/B: -7.96 to +12 dB Dig. Individual: 0 to +36 dB (RGB)
Gamma	0.45 to 1.0 (9 steps RGB, 1 step SWIR) or 257/256-point LUT
Image processing	PRNU/DSNU, black level, flat shading. Color shading & chromatic aberration correction (RGB channels).
Color space conversion (RGB channels)	RGB to HSI, RGB to XYZ (CIE), sRGB, Adobe RGB, or User Custom RGB
Exposure modes	No shutter, timed exposure (common/individ. RGB)
Electronic shutter	3 μs at fastest line rate (RGB), 20.38 μs at fastest line rate (SWIR). Exposure time can be longer at slower line rates.
Control interface	Camera Link, RS-232C
Lens mount	M52 mount (46.5 mm flange back)
Operating temp. (ambient)	-5°C to +45°C (20 to 80% non-condensing)
Storage temp. (ambient)	-25°C to +60°C (20 to 80% non condensing)
Vibration	10G (20 Hz to 200 Hz, XYZ directions)
Shock	50G
Regulations	CE (EN61000-6-2, EN61000-6-3) FCC Part 15 Class B, RoHS/WEEE
Power	12-pin +12V to +24V DC ± 10%
Power consumption	9.3 W typical @ +12V
Dimensions (H x W x L)	90 mm x 90 mm x 120 mm (without connector and lens mount protrusions)
Weight	~900 g
Ordering Information	
SW-4010Q-MCL-M52	RGB/SWIR prism line scan camera with M52 mount
JMO-M5231-2828-C4	28 mm custom VIS-SWIR optimized lens (optional)

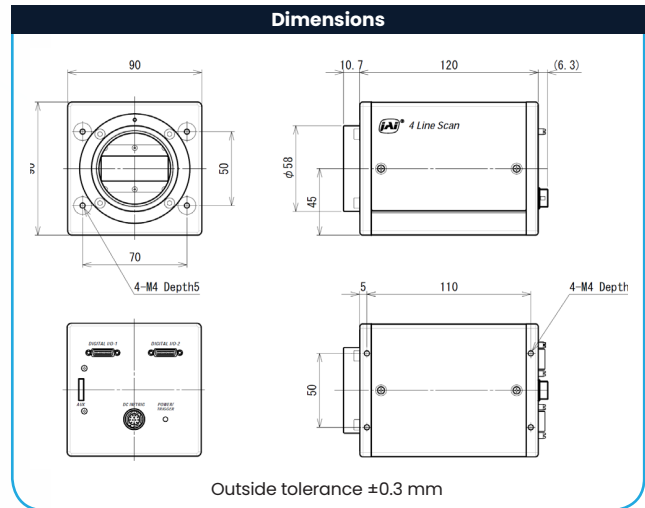

Connector pin-out

Mini-CL Interface

Digital I/O - 1

Digital I/O - 2

Pin	Signal	Function	Pin	Signal	Function
1	26	GND	1	26	GND
2	15	X0-/X0+	2	15	X0-/X0+
3	16	X1-/X1+	3	16	X1-/X1+
4	17	X2-/X2+	4	17	X2-/X2+
5	18	Xclk-/Xclk+	5	18	Xclk-/Xclk+
6	19	X3-/X3+	6	19	X3-/X3+
7	20	SerTC+/SerTC-	7	20	-
8	21	SerTFG-/SerTFG+	8	21	-
9	22	CC1-/CC1+	9	22	-
10	23	CC2+/CC2-	10	23	-
11	24	CC3-/CC3+	11	24	-
12	25	CC4+/CC4-	12	25	-
13	14	GND	13	14	GND


*Via Camera Link or 12-pin/10-pin connectors

DC In / Trigger

HIROSE HR10A-10R-12PB(71)

Pin	Signal
1	Ground
2	DC in +12V to +24V
3	Ground
4	Reserved
5	Opto in 1-
6	Opto in 1+
7	TTL out 4
8	NC
9	TTL out 1
10	TTL in 1
11	DC in +12V to +24V
12	Ground

For pin-out of 10-pin Hirose Aux connector, refer to manual

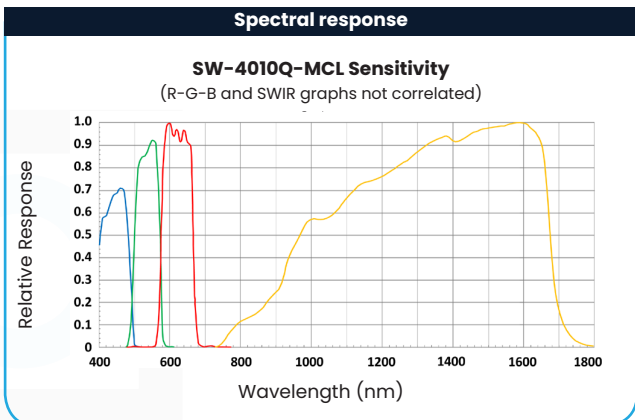

Product Highlights

- 4-channel R-G-B (CMOS) + SWIR (InGaAs) prism line scan camera
- Max. R-G-B line rate of 20.5 kHz for 4096 pixels, 40.8 kHz for 2048 pixels
- Max. SWIR line rate of 39.2 kHz for 1024 pixels
- Base pixel size of 7.5 x 7.5 μm for R-G-B channels, 25 x 25 μm for SWIR channel
- Beam-splitter prism with dichroic coatings enables all channels to be captured simultaneously with precise pixel-level alignment
- Flexible image rescaling function lets users easily adjust pixel size and line width of R-G-B channels to match FOV and pixel size of SWIR channel
- Traditional 400-700 nm spectral sensitivity for R-G-B (visible) channels
- SWIR channel provides spectral sensitivity from 800 to 1700 nm
- R-G-B functions include H/V binning, auto white balance, color space conversion, chromatic aberration correction, and more
- Supports direct encoder connection to camera
- Dual-base, Mini Camera Link output with independent RGB & SWIR line rates
- Custom, high performance 28 mm VIS-SWIR lens available as option

Additional Product Images



Company and product names mentioned in this datasheet are trademarks or registered trademarks of their respective owners.

JAI A-S and Machine Vision Direct, LLC Cannot be held responsible for any technical or typographical errors and reserves the right to make changes to products and documentation without prior notice