## **Machine**

**For Sales and Service** MachineVisionDirect.com +1 (800) 834-5588 Support@MachineVisionDirect.com



## **CF12.5HA-1 Technical Datasheet**

1‴



## **Fujinon CF-HA Series**



Fujifilm's Fujinon CF-HA series lenses offer a 7.4µm resolving power (equivalent to 1.5 megapixels) and are designed for use with 1" and smaller sensors. The CF-HA series is available in 6 variants from 12.5 mm to 75 mm and offer low distortion thanks to Fujinon's aspherical lens design

## **Specification Highlights**

FOCAL LENGTH:	12.5 mm
FORMAT:	1″
PIXEL SIZE:	7.4 µm
LENS MOUNT:	C-Mour
APERTURE:	F1.4-F22

٦ nt

WORKING DISTANCE: FILTER THREAD: WEIGHT: **RESOLUTION MP:** LENS CLASS:

100 mm - Infinity M49 x 0.75 290 grams 1.5 MP **Fixed Focal Length** 






For Sales and Service


MachineVisionDirect.com +1 (800) 834-5588 Support@MachineVisionDirect.com

## **Full Specifications**

Focal Length	12.5 mm	Flange Back	17.526 mm
Focal Length Design Value	12.83 mm	Entrance Pupil Position (From Mount)	Not Specified
Iris Range (f-number)	F1.4-F22	Exit Pupil Position (From Image Plane)	-116.87 mm
Angle of View	53.1° x 41.2° (2/3″)	Front Principal Point (From Mount)	-33.68 mm
Working Distance (From Front of Lens Barrel)	100 mm - Infinity	Rear Principal Point (From Mount)	4.70 mm
Operation of Focus	Manual	Distance Between Principal Points	38.37 mm
Operation of Iris	Manual	TV Distortion	0.86%
Filter Thread	M49 x 0.75	Dimensions	φ51 × 68.5
Mount	C-Mount	Chief Ray Angle	Not Specified
Weight	290 Grams	Relative Illumination (Aperture F4.0; Image Height at Diagonal)	Not Listed
Sensor Size (Standard)	Ι" (7.4 μm)	Relative Illumination (Aperture at Full Open; Image Height at Diagonal)	40%
Back Focal Length (In Air)	16.07 mm	Operation Temperature	-10°C - +50°C

### Dimensions

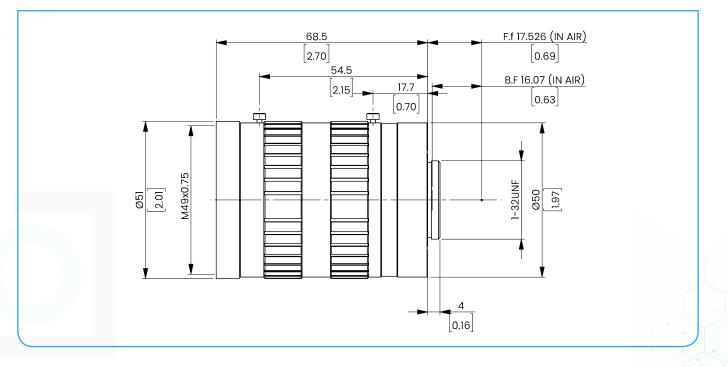



#### For Sales and Service


MachineVisionDirect.com +1 (800) 834-5588 Support@MachineVisionDirect.com

### **CF12.5HA-1 REFERENCE FOV CHART**

Working	Working	Extension	Field of View (mm)									
Distance	Optical Magnification	Ring	1″		1/1.2″		2/3″		1/1.8″		1/2″	
(mm)	Magnineation	(mm)	н	v	н	v	н	v	н	v	н	v
1000	0.013x	-	1023.1	768.3	858.2	642.7	703.9	526.9	568.7	425.8	510.8	382.5
950	0.013x	-	973.1	730.7	816.2	611.3	669.5	501.1	540.8	404.9	485.8	363.7
900	0.014x	-	923.1	693.1	774.2	579.8	635.0	475.2	513.0	384.0	460.7	345.0
850	0.015x	-	873.1	655.5	732.2	548.3	600.5	449.4	485.1	363.1	435.7	326.2
800	0.016x	-	823.0	617.8	690.2	516.8	566.0	423.6	457.2	342.3	410.7	307.5
750	0.017x	-	773.0	580.2	648.2	485.3	531.6	397.8	429.4	321.4	385.6	288.7
700	0.018x	-	723.0	542.6	606.2	453.8	497.1	372.0	401.5	300.5	360.6	270.0
650	0.019x	-	673.0	505.0	564.2	422.3	462.6	346.1	373.6	279.7	335.6	251.2
600	0.021x	-	623.0	467.4	522.2	390.8	428.1	320.3	345.8	258.8	310.5	232.5
550	0.023x	-	573.0	429.7	480.2	359.3	393.6	294.5	317.9	237.9	285.5	213.7
500	0.025x	-	522.9	392.1	438.2	327.9	359.1	268.7	290.0	217.0	260.5	195.0
450	0.027x	-	472.9	354.5	396.1	296.4	324.7	242.8	262.1	196.2	235.4	176.2
400	0.031x	-	422.9	316.8	354.1	264.9	290.2	217.0	234.3	175.3	210.4	157.5
350	0.035x	-	372.8	279.2	312.1	233.4	255.7	191.2	206.4	154.4	185.3	138.7
300	0.040x	-	322.8	241.5	270.1	201.8	221.2	165.3	178.5	133.5	160.3	119.9
250	0.048x	-	272.7	203.9	228.0	170.3	186.6	139.5	150.6	112.6	135.2	101.2
200	0.058x	-	222.6	166.2	185.9	138.8	152.1	113.6	122.7	91.7	110.1	82.4
150	0.076x	-	172.3	128.4	143.8	107.2	117.5	87.7	94.7	70.8	85.0	63.6
100	0.108x	-	122.0	90.6	101.5	75.5	82.8	61.8	66.7	49.8	59.9	44.7

FOV Charts are intended to be used as general guidance and are not guaranteed to be accurate as all sensors do not have the same dimensions, including sensors with the same format size. For the most accurate approximations, please use a lens calculator that accounts for your specific sensor dimensions



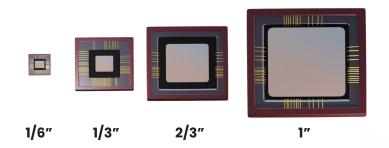

## **Sensor Formats**

It is important to make sure you size your lens to the correct sensor size (format). The image you get from a 2/3" format lens will provide a smaller Field of View when used with a 1/3" format sensor than it will provide when used with a 2/3" format sensor, even with the same working distance



# 

#### **For Sales and Service**

MachineVisionDirect.com +1 (800) 834-5588 Support@MachineVisionDirect.com

### **Sensor Size Compatibility Chart**

	Model	Compatible format sizes								<b>Focal length</b>
		4/3	1.1	1	1/1.2	2/3	1/1.8	1/2	1/3	(mm)
	<u>CF12.5HA-1</u>	-	-	•	•	•	•	٠	•	12.5
	<u>CF16HA-1</u>	-	-	•	•	•	•	٠	•	16
	<u>CF25HA-1</u>	-	-	•	•	•	•	٠	•	25
	<u>CF35HA-1</u>	-	-	•	•	•	•	٠	•	35
	<u>CF50HA-1</u>	-	-	•	•	•	•	٠	•	50
	<u>CF75HA-1</u>	-	-	٠	•	•	•	٠	•	75

• Compatible sensor size (std.): Ideal size to maximize the target resolution.

Please note that not all sizes of sensors are listed on this chart. It is generally okay to use larger format lenses with smaller format sensors, but not the other way around



## **Properly Sized Lens Format**

A camera with a properly sized lens will project an image that will cover the whole sensor



### **Undersized Lens Format**

A camera with an undersized lens format will project an image that will not cover the whole sensor. This will cause vignetting of the image





For Sales and Service

MachineVisionDirect.com +1 (800) 834-5588 Support@MachineVisionDirect.com

#### **CF-HA SERIES LENSES**

CF12.5HA-1	FOCAL LENGTH: APERTURE: WORKING DISTANCE: FORMAT: FILTER THREAD:	12.5 mm F1.4-F22 100 mm - Infinity 1″ M49 x 0.75	
CF16HA-1	FOCAL LENGTH: APERTURE: WORKING DISTANCE: FORMAT: FILTER THREAD:	16mm F1.4-F22 100mm - Infinity 1″ M49 x 0.75	
CF25HA-1	FOCAL LENGTH: APERTURE: WORKING DISTANCE: FORMAT: FILTER THREAD:	25 mm F1.4-F22 100 mm - Infinity I″ M49 x 0.75	
CF35HA-1	FOCAL LENGTH: APERTURE: WORKING DISTANCE: FORMAT: FILTER THREAD:	35 mm F1.4-F22 200 mm - Infinity I" M49 x 0.75	
CF50HA-1	FOCAL LENGTH: APERTURE: WORKING DISTANCE: FORMAT: FILTER THREAD:	50 mm F1.8-F22 400 mm - Infinity 1″ M49 x 0.75	
CF75HA-1	FOCAL LENGTH: APERTURE: WORKING DISTANCE: FORMAT: FILTER THREAD:	75 mm F1.8-F22 900 mm - Infinity I" M49 x 0.75	



**For Sales and Service** MachineVisionDirect.com +1 (800) 834-5588

Support@MachineVisionDirect.com

			OOFD	
FUJ	INON	LEN	S SER	IES

	FOCAL LENGTH:	6 mm, 9 mm, 12.5 mm 16 mm, 25 mm, 35 mm 50 mm, 75 mm	
GOOD HF-HA-1S	PIXEL SIZE: FORMAT:	6.2 μm 2/3″	VIEW SERIES
	RESOLUTION:	1.5 MP	
	FOCAL LENGTH:	12.5 mm, 16 mm, 25 mm 35 mm, 50 mm, 75 mm	
HF-SA	PIXEL SIZE:	3.45 μm	VIEW SERIES
Sand Barrier	FORMAT: RESOLUTION:	2/3″ 5 MP	
	FOCAL LENGTH:	6 mm, 8 mm, 12 mm 16 mm, 25 mm 35 mm, 50 mm	
HF-XA-5M	PIXEL SIZE:	3.45 µm	VIEW SERIES
	FORMAT: RESOLUTION:	2/3″ 5 MP	
		8 mm, 12 mm, 16 mm 25 mm, 35 mm	
HF-XA-1F	PIXEL SIZE:	3.45 µm	VIEW SERIES
	FORMAT:	2/3″	
	RESOLUTION: FOCAL LENGTH:	5 MP 8 mm, 12 mm, 16 mm	
		25 mm, 35 mm	
HF-12M	PIXEL SIZE:	2.1 µm	VIEW SERIES
	FORMAT: RESOLUTION:	2/3″ 12 MP	
a 2		8 mm, 12 mm, 16 mm 25 mm, 35 mm, 50 mm	
CF-ZA-1S	PIXEL SIZE:	2.74 µm	VIEW SERIES
	FORMAT:	1.1″	
_	<b>RESOLUTION:</b>	23 MP	
	FOCAL LENGTH:	12.5 mm, 16 mm, 25 mm 35 mm, 50 mm, 75 mm	
CF-HA	PIXEL SIZE:	7.4 μm	VIEW SERIES
Martin Base	FORMAT: RESOLUTION:	1″ 1.5 MP	
		6 mm, 9 mm, 12.5 mm 16 mm, 25 mm, 35 mm 50 mm, 75 mm	
FE185	PIXEL SIZE:	6.2 μm	VIEW SERIES
	FORMAT:	2/3"	
	RESOLUTION:	1.5 MP	•

Company and product names mentioned in this datasheet are trademarks or registered trademarks of their respective owners.

Fujifilm, Fujinon, Machine Vision Direct, LLC and all of the subsidiaries and parent companies of the aforementioned companies cannot be held responsible for any technical or typographical errors and reserve the right to make changes to products and documentation without prior notice Revision 6/11/2023

