

# GO-5101M-PGE

## Technical Datasheet

IMX264



See the possibilities



## Apex Series






JAI's Go Series delivers an exceptional blend of small size, high versatility, and excellent performance, all at an entry-level price, making the cameras a perfect starting point for a wide range of machine vision applications.

CMOS technology, low-noise pixels, global shutters, sequencer functions, and other advanced features help ensure image quality and operational flexibility beyond entry-level expectations.

### Specification Highlights

<b>SENSOR:</b>	IMX264	<b>SHUTTER:</b>	Global Shutter
<b>FORMAT:</b>	2/3"	<b>FRAME RATE:</b>	22 fps
<b>PIXEL SIZE:</b>	3.45 x 3.45 $\mu$ m	<b>INTERFACE:</b>	GigE Vision 1-Cable (PoE)
<b>LENS MOUNT:</b>	C-Mount	<b>RESOLUTION MP:</b>	5.1 MP
<b>SPECTRUM:</b>	Monochrome (Visible + NIR)	<b>RESOLUTION WxH:</b>	2464 x 2056 px

Specifications		GO-5101-PGE
Sensor		2/3" CMOS global shutter (IMX264)
System clock		74.25 MHz (for pulse generator)
Frame rate, full frame		22.7 frames/sec. @ 8-bit
Active area		8.5 mm (h) x 7.09 mm (v), 11.1 mm diagonal
Cell size		3.45 $\mu\text{m}$ (h) x 3.45 $\mu\text{m}$ (v)
Active pixels		2464 (h) x 2056 (v)
Read-out modes		
Full ROI (mono)		2464 (h) x 2056 (v) up to 22.7 fps H: 16 to 2464 pixels in 16 pixel steps V: 4 to 2056 lines in 2 line steps
ROI (color)		H: 16 to 2464 pixels in 16 pixel steps V: 4 to 2056 lines in 2 line steps
Binning		1x2, 2x1, 2x2 (monochrome only)
EMVA 1288 Parameters		At 12-bit output
Absolute sensitivity (mono)		3.54 p ( $\lambda = 525 \text{ nm}$ )
Absolute sensitivity (color)		3.94 p ( $\lambda = 525 \text{ nm}$ )
Maximum SNR (mono)		40.26 dB
Maximum SNR (color)		40.26 dB
Traditional SNR*	mono color	>60 dB (0 dB gain) >60 dB (0 dB gain, green,)
Video signal output	mono color	8/10/12-bit monochrome <sup>†</sup> 8/10/12-bit raw Bayer <sup>†</sup>
Gain control		Manual/auto 0 dB to +24 dB
White balance (GO-5100C)		Manual, one-push auto, or continuous (3000K to 9000K)
White balance (GO-5100C)		Manual, one-push auto, or continuous (3000K to 9000K)
Gamma/LUT		0.45, 0.6, 1.0 or 256-point LUT
Synchronization		Internal
Video modes		Normal, Single ROI, Sequencer (Trigger & Command), Delayed Readout
Trigger input		Opto In, Pulse Generator, Software, NAND Out (2), User Output (2), Action Commands (2)
Trigger modes		Timed/EPS, Trigger Width, Sequencer
Electronic shutter		
Timed exposure		14.7 $\mu\text{s}$ to 8 sec. in 1 $\mu\text{s}$ steps (8-bit)
Auto shutter		8 sec. to 1/10,000 sec.
Auto Level Control (ALC)		Shutter range from 8 sec. to 1/10,000, gain range from 0 dB to +24 dB Tracking speeds and max values adjustable.
Pre-processing functions		Blemish compensation (512 pixels), shading
Operating temperature		-5°C to +45°C
Storage temperature		-25°C to +60°C
Humidity		20 - 80% non-condensing
Vibration		10 G (20 Hz to 200 Hz XYZ)
Shock		80 G
Regulations		CE (EN61000-6-2, EN61000-6-3), FCC Part 15 class B, RoHS, WEEE
Power	6-pin connector PoE	12V to 24V DC $\pm 10\%$ . 3.3W typical @ 12V 36V to 57V DC. 3.99W typical @ 48V
Lens mount		C-mount
Dimensions (H x W x L)		29 mm x 29 mm x 41.5 mm (excl. lens mount)
Weight		46 g
Ordering Information		
GO-5101M-PGE		Monochrome camera with GigE Vision
GO-5101C-PGE		Color camera with GigE Vision

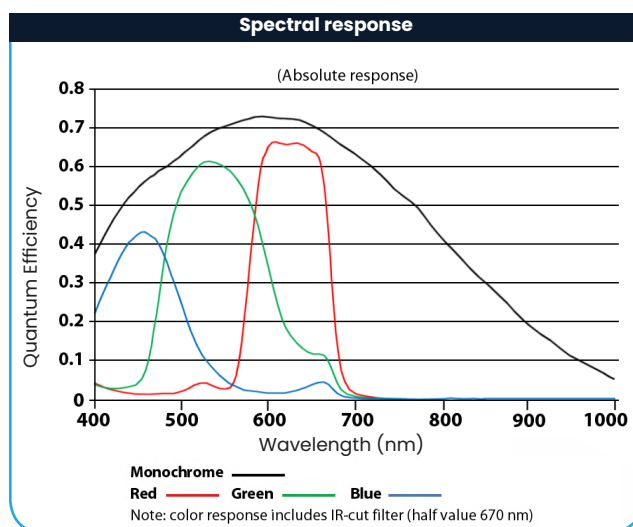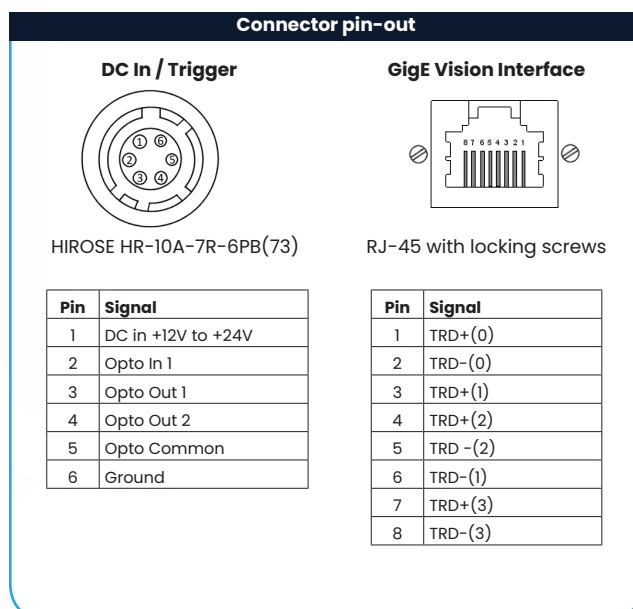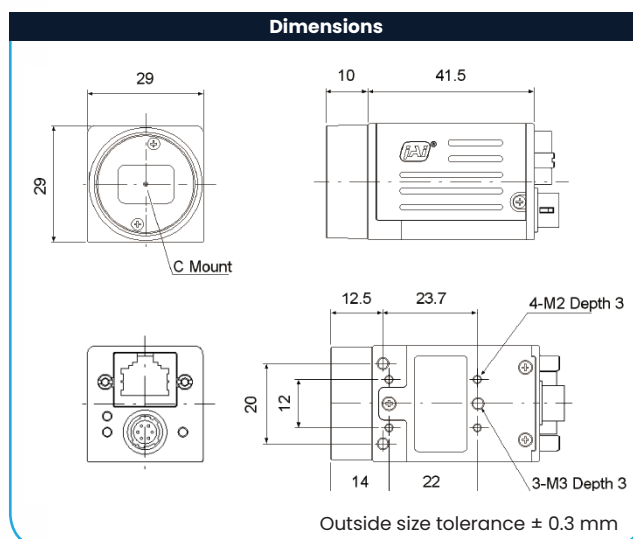

\*Traditional SNR is based on random noise in a single frame, where EMVA SNR measurements consider more comprehensive noise sources and variance over time. For a more complete description, see the manual.

<sup>†</sup>12-bit output available in video processing bypass mode. See manual for details.

## Product Highlights

- 5.1-megapixel 2/3" CMOS imager (global shutter)
- Up to 22.7 fps at full resolution
- 3.45  $\mu\text{m}$  square pixels
- Small size (29 x 29 x 41.5 mm, excluding lens mount)
- 8/10-bit output in a choice of monochrome or raw Bayer color models
- Exposure control from 14  $\mu\text{s}$  to 8 seconds in 1  $\mu\text{s}$  steps
- 2X binning for increased sensitivity (monochrome only)
- ROI mode for flexible windowing and use of smaller optics
- Automatic Level Control (ALC) for dynamic lighting conditions
- Accepts power over GigE Vision interface or separate 6-pin connector
- C-mount lens mount

## Additional Product Images



Company and product names mentioned in this datasheet are trademarks or registered trademarks of their respective owners.

JAI A-S and Machine Vision Direct, LLC Cannot be held responsible for any technical or typographical errors and reserves the right to make changes to products and documentation without prior notice