

# GOX-12409C-PGE

## Technical Datasheet



See the possibilities

**IMX226 (Rolling)**



## Apex Series



The Go-X Series offers compact, attractively-priced area scan cameras with a blend of features, image quality and industrial grade reliability that is in high demand for the next generation of machine vision systems.


The Go-X Series incorporates the most popular Sony Pregius and Pregius S global shutter CMOS sensors, and several Starvis CMOS sensors with rolling shutter technology. Resolutions range from 2.3 to 24.5 megapixels with a choice of USB3 Vision, GigE Vision (1000BASE-T or 5GBASE-T), or CoaXPress interfaces.

### Specification Highlights

**SENSOR:** IMX226 (Rolling)  
**FORMAT:** 1/1.7"  
**PIXEL SIZE:** 1.85 x 1.85  $\mu\text{m}$   
**LENS MOUNT:** C-Mount  
**SPECTRUM:** Color (Visible)

**SHUTTER:** Global Shutter  
**FRAME RATE:** 9 fps  
**INTERFACE:** GigE Vision 1-Cable (PoE)  
**RESOLUTION MP:** 12.2 MP  
**RESOLUTION WxH:** 4016 x 3036 px

Specifications		GOX-12409-PGE
Sensor	1/1.7" CMOS rolling shutter (IMX226)	
Active pixels	4016 (h) x 3036 (v)	
Frame rate	9 frames/sec. @ 8-bit mono/Bayer	
Active area	7.44 mm (h) x 5.61 mm (v) - 9.32 mm diagonal	
Pixel size	1.85 μm x 1.85 μm	
System clock	74.25 MHz (for pulse generator)	
Read-out modes		
Full ROI (single)	4016 (h) x 3036 (v) up to 9 fps H: 96 - 4016 pixels in 16-pixel steps V: 8 to 3036 lines in 2-line steps	
Binning	1x2, 2x1, 2x2 (mono only)	
EMVA 1288 Parameters	10-bit output format	
Absolute sensitivity	Mono: TBD p Color: TBD p ( $\lambda = 527 \text{ nm}$ )	
Maximum SNR	Mono: TBD dB Color: TBD dB	
Traditional SNR*	>60 dB mono, >60 dB color (0 dB gain, 10-bit)	
Video signal output	Monochrome: 8/10/12-bits <sup>†</sup> Color: 8/10/12-bit Bayer <sup>†</sup>	
Gain control	Manual/auto 0 dB to +24 dB	
White balance	Off, presets, or one-push/continuous AWB	
Gamma/LUT	0.45 to 1.0 (9 steps) or 257-point programmable LUT	
Synchronization	Internal	
Video modes	Normal/Single ROI	
Trigger input	Opto In, Pulse Generator, Software, NAND Out (2), User Output (4)	
Exposure modes	Timed/EPS, Auto	
Electronic shutter (TriggerMode OFF)	Timed: 80.06 μs to 1.2 s in 1 μs steps Auto: 100 μs to 107 ms at full resolution	
Auto Level Control (ALC)	Shutter range from 100 μs to 107 ms, gain range from 0 dB to +42 dB. Tracking speeds and max. values adjustable.	
Shading correction	Flat shading, color shading (color model)	
Pre-processing functions	Blemish compensation (256 user definable)	
Operating temp. (ambient)	-5°C to +45°C (20 to 80% non-condensing)	
Storage temp. (ambient)	-25°C to +60°C (20 to 80% non condensing)	
Vibration	10G (20 Hz to 200 Hz, XYZ directions)	
Shock	80G	
Regulations	CE(EN 55032:2015(CISPR32:2015), EN 55035:2017(CISPR35:2016)), FCC Part 15 Class A, RoHS/WEEE, KC	
Power	6-pin PoE	+10V to +25V DC. 2.7 W typical @ +12 V +36V to +57 V DC. 3.7 W typical @ +48 V
Lens mount	C-mount	
Dimensions (H x W x L)	29 mm x 29 mm x 51.5 mm	
Weight	65 g	
Ordering Information		
GOX-12409M-PGE	Monochrome camera with GigE Vision interface	
GOX-12409C-PGE	Color camera with GigE Vision interface	

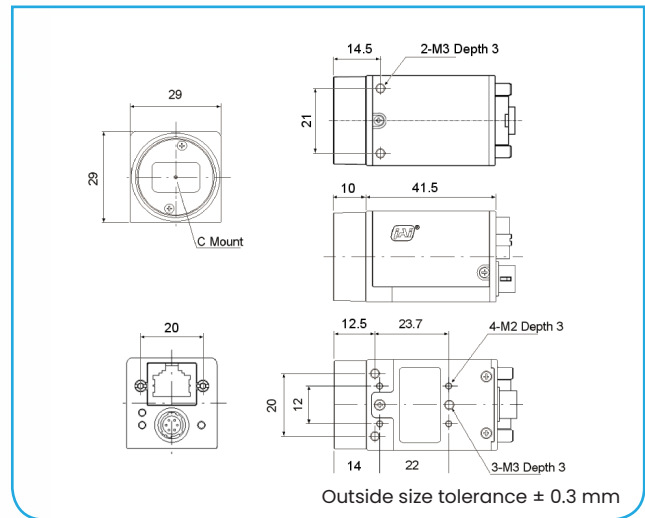

### Connector pin-out

**DC In / Trigger**


HIROSE HR10A-7R-6PB(73)

Pin	Signal
1	DC in +10V to +25V
2	Opto In+
3	Opto In-
4	Opto Out+
5	Opto Out-
6	Ground

**GigE Vision Interface**

RJ45 with locking screws

Pin	Signal
1	TRD+(0)
2	TRD-(0)
3	TRD+(1)
4	TRD+(2)
5	TRD-(2)
6	TRD-(1)
7	TRD+(3)
8	TRD-(3)

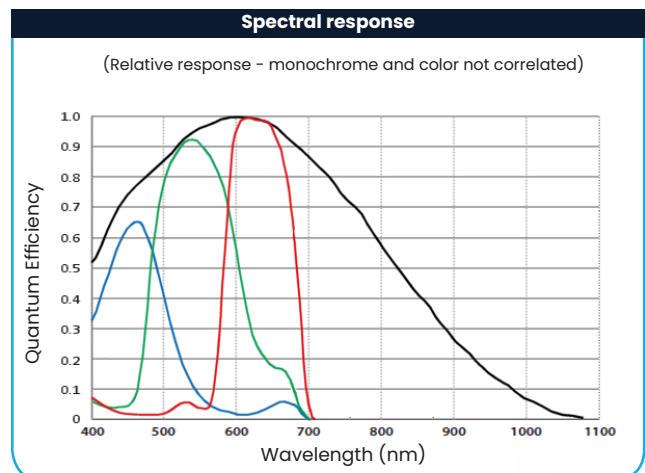

\*Traditional SNR is based on random noise in a single frame, where EMVA SNR measurements consider more comprehensive noise sources and variance over time.

<sup>†</sup>12-bit output only available in video processing bypass mode. See manual for details.

## Product Highlights

- 1/1.7" CMOS imager (rolling shutter with global reset)
- Up to 9 fps at full resolution (4016 x 3036)
- 1.85  $\mu\text{m}$  square pixels
- Backside illuminated (BSI) sensor technology for enhanced low-light performance
- 8/10/12-bit\* output in choice of monochrome or raw Bayer color models
- ROI settings for added flexibility
- Includes Automatic Level Control (ALC) to maintain exposure in dynamic lighting conditions
- Compact size with excellent shock and vibration resistance
- Accepts power over GigE Vision interface or separate 6-pin connector
- C-mount lens mount

\* Not all processing functions supported with 12-bit output.

## Additional Product Images



Company and product names mentioned in this datasheet are trademarks or registered trademarks of their respective owners.

JAI A-S and Machine Vision Direct, LLC Cannot be held responsible for any technical or typographical errors and reserves the right to make changes to products and documentation without prior notice