



1 2 3 4 5 6

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	RELEASED FOR PRODUCTION	9/14/2022	DMM

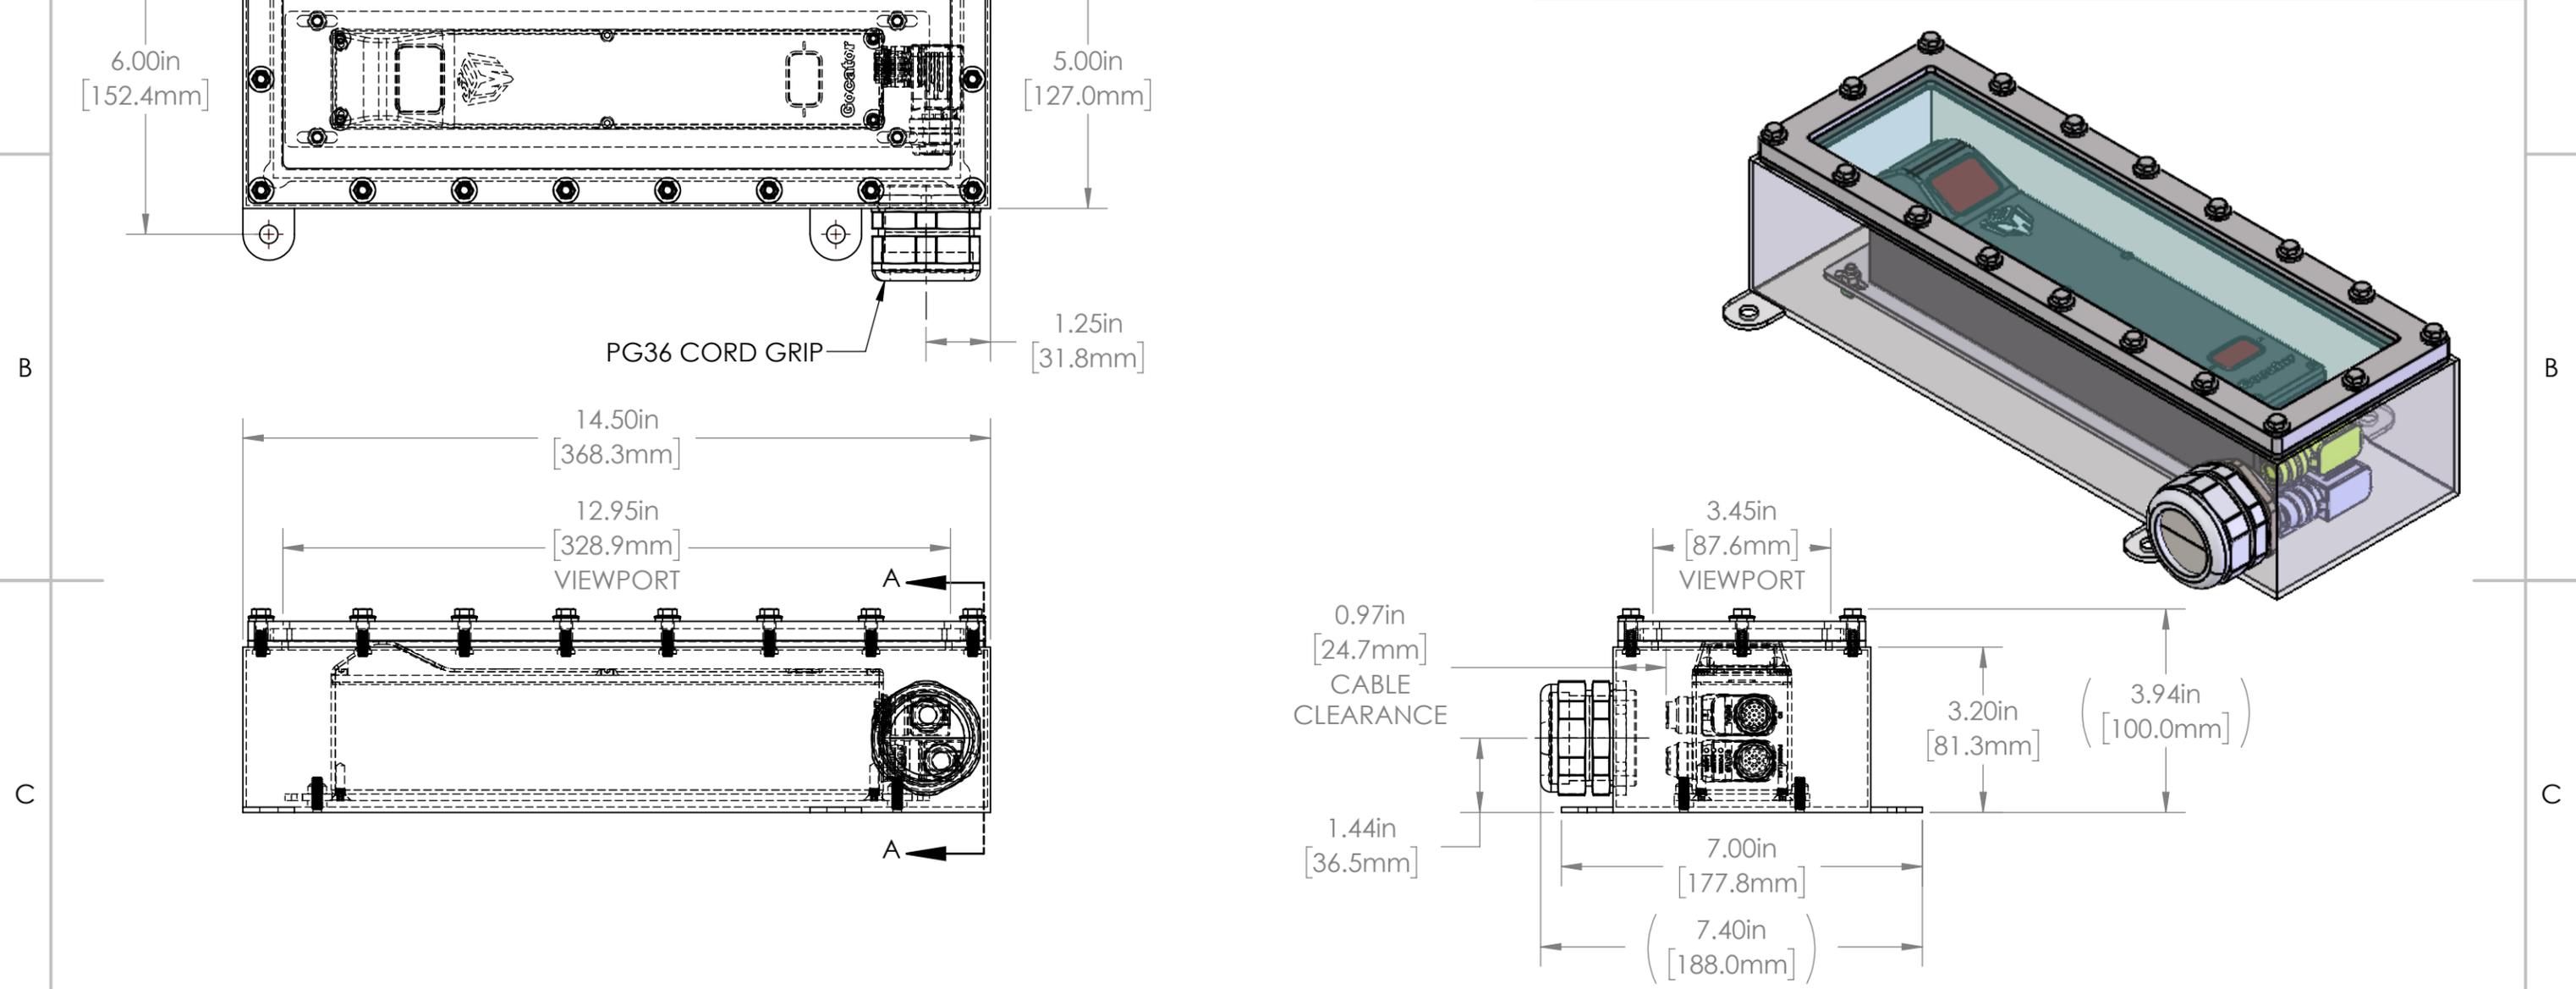

LL SERIES PROPERTIES TABLE		
ENVIRONMENT RATING	IP68*	
	(*RATING MAY CHANGE IF INSTALLER MILLS CABLE GLAND OUTSIDE OF TOLERANCE)	
COMPONENT	MATERIAL	FINISH
BODY/FACEPLATE	316 SS	BURNISHED
VIEWPORT	SODA LIME GLASS	NONE
GASKETS	VITON	NONE
ARM/ADAPTER	6061-T6 ALUMINUM	NONE
HARDWARE	316 SS - EXTERNAL, 18-8 SS - INTERNAL	NONE

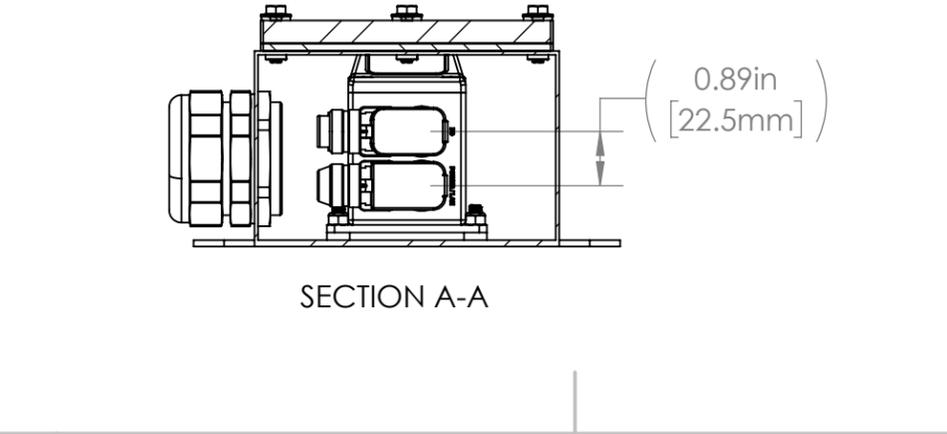

TOLERANCES UNLESS OTHERWISE SPECIFIED	
MACHINING	SHEET METAL
X.X 0.0250"	HOLE TO HOLE (SAME SURFACE)
X.XX 0.0100"	X.X 0.030"
X.XXX 0.0050"	X.XX 0.010"
X.XXXX 0.0005"	X.XXX 0.015"
ANGULAR 0.5°	HOLE TO FOLDED EDGE
DEBURR ALL	X.X 0.035"
	X.XX 0.025"
	X.XXX 0.015"
	FOLD TO FOLD
	X.X 0.045"
	X.XX 0.035"
	X.XXX 0.020"
	ANGULAR 1.0°

APG Vision LLC
4055 Alpha Drive
Allison Park, PA 15101 USA
Phone +1 (412) 487-8211
apgvision.com

apgvision

DESCRIPTION:
LL SERIES ENCLOSURE WITH POCKETED FACEPLATE, GLASS VIEWPORT, & VITON GASKETS FOR GOCATOR 2150/2350 WITH 90° CONNECTORS

MATERIAL: SEE PROPERTIES TABLE

FINISH: SEE PROPERTIES TABLE

DRAWN BY: GAS DATE: 9/14/2022 SCALE: 1:3 SHT-SIZE: B APPROX. WEIGHT (LBS): 10.8471

CHECKED BY: DMM DATE: 9/14/2022 PART NUMBER: LL-EY REVISION: A

Sheet 1 of 1

1 2 3 4 5 6